

# UNIVERSAL LED DIMMER MANUAL INSTRUCTION


Item No. 960000101

This dimmer has been developed specially for dimmable LED Lamps.

Most dimmable LED lamps are suitable for trailing edge dimming however, there are still some lamps prefer leading edge dimming. The latest dimming technology allows the dimmer to adjust the dimming mode automatically.

**Note: please avoid using mixed loads on the same circuit.**

Additionally, the minimum brightness setting of the dimmer can be adjusted to achieve the optimum dimming range for a particular load. See "Adjusting the Minimum Brightness" below.

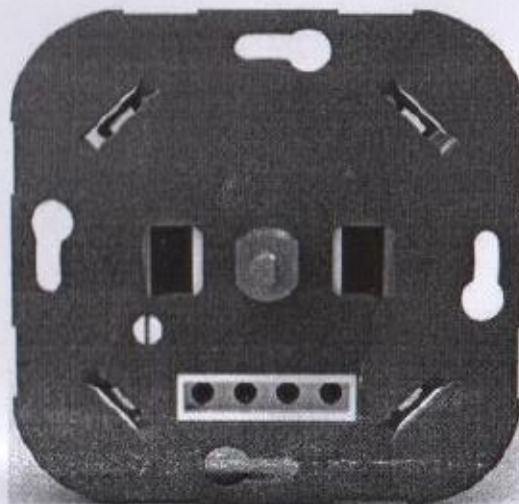


## SPECIFICATION

Operating Voltage	220-240V ~
Frequency	50 Hz
Maximum Load	300 W/VA
Minimum Load	5 W/VA
Dimming Mode	Leading / Trailing Edge
Extension option	Single push-button(s)
Dimmable LED lamps	RL mode: 5-200W/VA RC mode: 5-300W/VA
Halogen	10-300W/VA
Incandescent	10-300W/VA

CE	The device is in compliance with CE EN 60669-2-1
<del>Waste</del>	Should not be disposed with other household wastes.
!	This product is not a toy. Keep away from children and animals.
<del>Moisture</del>	Do not expose this product to moisture, water or other liquids.
<del>Repair</del>	Do not attempt to examine or repair this product yourself.
<del>Outdoor</del>	This product is designed for indoor use only. Do not use outside!

## WIRING INSTRUCTION

### One way wiring connection:

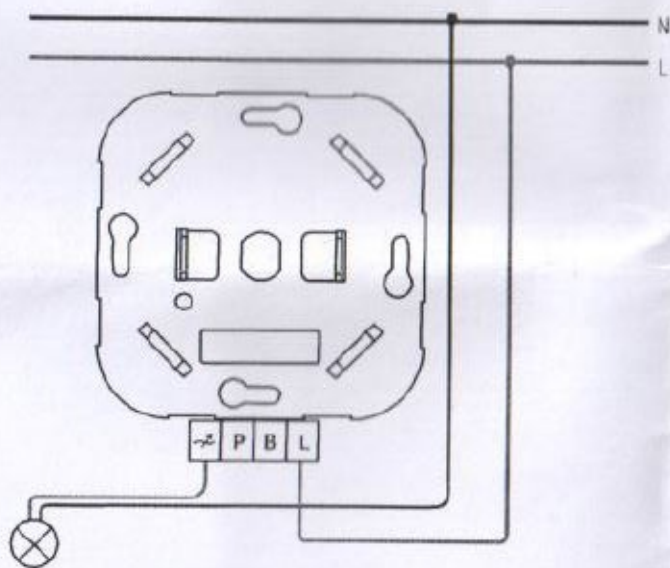

### Multiway way master / slave wiring connection:

Once connected with a push switch, click the push switch to switch ON/OFF, Press and hold to increase or decrease light intensity.

